

Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N95BL200

[Link to product's PDF drawing](#)


TECHNICAL FEATURES:

Type	N95BL200
Type	Melt Blown
Height	20"
Micron	1 / 5 / 20 / 50
Efficiency	95%
Hot sanitizing	No

APPLICATIONS

Water
Sea water

OTHER APPLICATIONS ONLY AFTER WRITTEN APPROVAL OF MANUFACTURER

Biotechnology/Fine chemicals
Food/Beverage
Coatings/Resins
General Industrial
Bulk Chemicals/Petrolchemicals
Galvanic
Pharmaceutical/Cosmetics
Drinking Water

MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	None

PRESSURE

Max differential pressure at 20°C	2 bar
Recommended change-out differential pressure	1 bar

TEMPERATURE

Max working temperature	50°C
-------------------------	------



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure

Code	Description	Height	Micron	Flow l/h ¹	Filtrating surface	Quantity box	€/each
N95BL2002001BLS	N95BL200 20-01	20"	1-10	12.000	0,27 m ²	1	-
N95BL2002005BLS	N95BL200 20-05	20"	5-20	18.000	0,27 m ²	1	-
N95BL2002020BLS	N95BL200 20-20	20"	20-50	18.000	0,27 m ²	1	-
N95BL2002050BLS	N95BL200 20-50	20"	50-90	18.000	0,27 m ²	1	-

¹ Max water flow rate at 20°C and differential pressure 0,15 bar

Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N95BL200

END CAPS LIST

End Caps	BL
CODE	BL



CARTRIDGES CODE LIST

Model	Height		Micron		Connection		Seals	
N95BL200	20"	20	1-10 µm	01	BL	BL	Silicone	S
			5-20 µm	05			Other available orings	
			20-50 µm	20			EPDM	E
			50-90 µm	50			NBR	N
							Teflon	T
							Viton	V

* standard o-ring


Depth filtration cartridges

POLYPROPYLENE MELT BLOWN CARTRIDGE

N95BL200

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

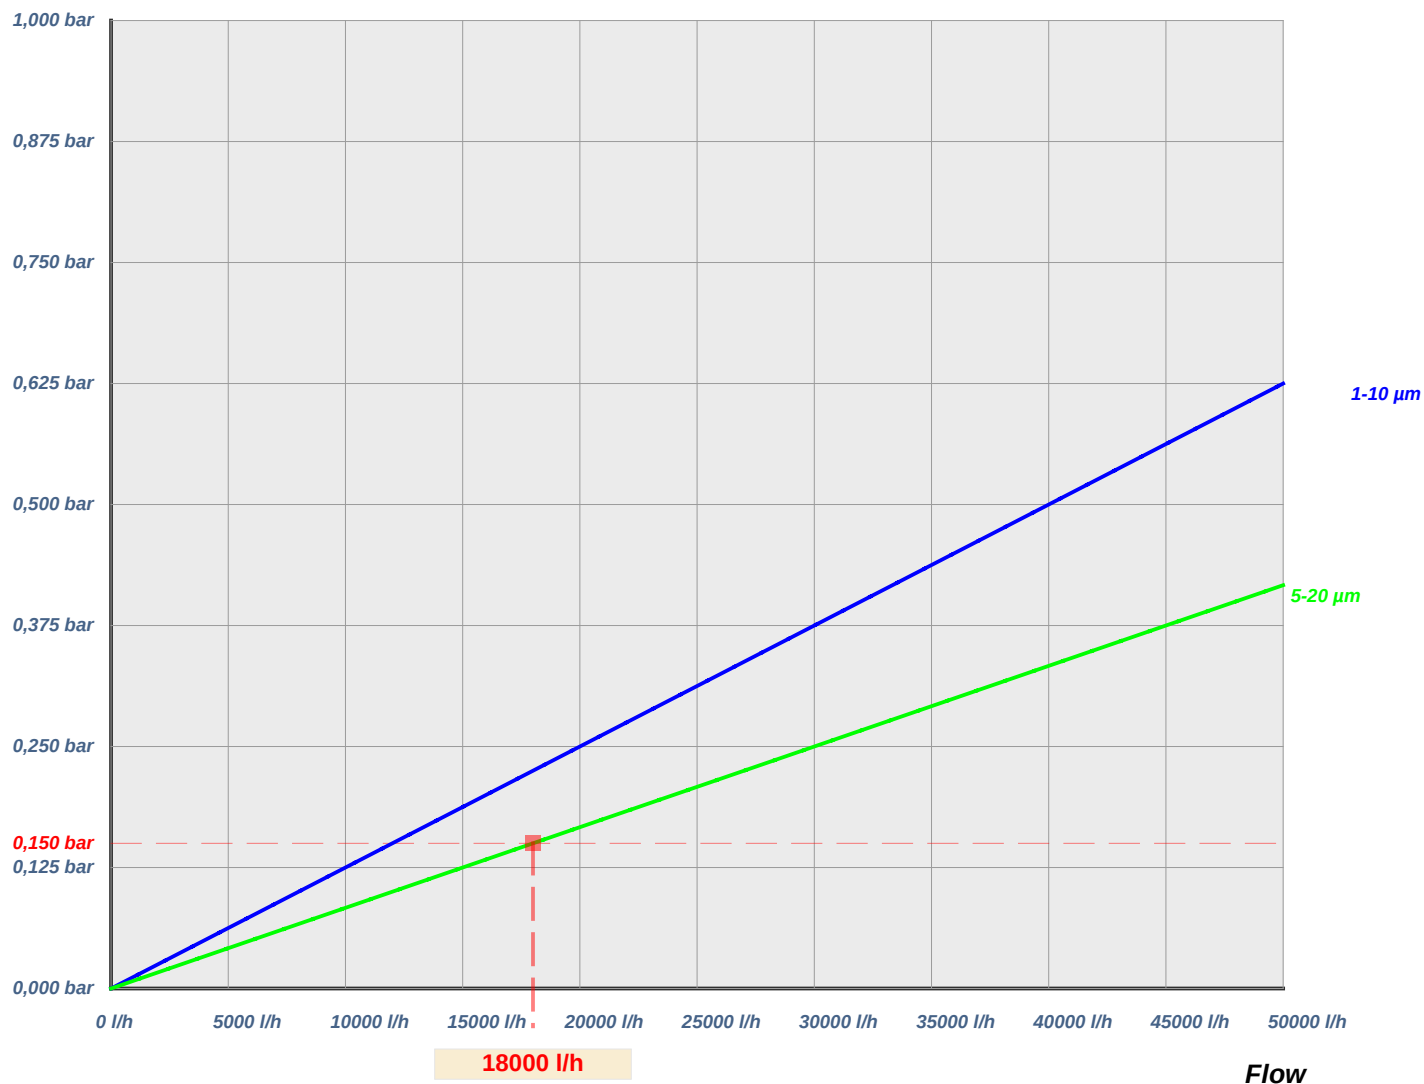

Graphic refers to 20" height cartridges. Make the correct proportion to obtain flow for taller cartridges.

Flow