

Industrial self cleaning filters

BACKWASHABLE SELF CLEANING FILTERS

FILBLUE FBL-4000-02-4RS

[Link to product's PDF drawing](#)

TECHNICAL FEATURES:

Type	FILBLUE FBL-4000-02-4RS
Material	FRP (Fiberglass)
N. basket - Height	8x20 "
Continuous flow	No
Micron	50, 80, 125, 200, 300, 500, 800
Efficiency	90%
Efficiency on non compressible particles	High
Efficiency on compressible particles	Good
Efficiency on light particles	Good

DESIGN DATA

Min working pressure	1 bar
Max working pressure	10 bar
Hydraulic test pressure	15 bar
Max working temperature	50°C
pH min	5
pH max	8
Max diameter inlet particles	3 mm
Max total suspended solids	50 mg/l (50-80 Micron) 100 mg/l (125-200-300-500-800 Micron)
Max pressure difference	2 bar

POWER

Electric power	-
Electric power solenoid valve	-
Air pressure min	-
Air pressure max	0 bar

Industrial self cleaning filters

BACKWASHABLE SELF CLEANING FILTERS

FILBLUE FBL-4000-02-4RS

APPLICATIONS

Water
Sea water
Prefiltration for water treatment plants
Process water
Evaporative cooling towers
Heat exchangers
Irrigation
Aquaculture
Protection of spray nozzles
Prefiltration for ultrafiltration (UF) plants
Prefiltration for reverse osmosis (RO) plants

Code	Description	Filtering surface	Connection In/Out	Connection drain	Micron	Flow rate	Cleaning flow rate at 2 bar(m3/h)"	Cleaning time (sec)	Power needed (Watt)	Quantity box	€/each
FBL40004RSFRP082050WH	FILBLUE FBL-4000-02-4RS	1.76 m ²	8x20 "	1" 1/2 VICTAULIC	50	144.000	144,00	10	0	1	-
FBL40004RSFRP082080WH	FILBLUE FBL-4000-02-4RS	1.76 m ²	8x20 "	1" 1/2 VICTAULIC	80	144.000	144,00	10	0	1	-
FBL40004RSFRP0820125WH	FILBLUE FBL-4000-02-4RS	1.76 m ²	8x20 "	1" 1/2 VICTAULIC	125	144.000	144,00	10	0	1	-
FBL40004RSFRP0820200WH	FILBLUE FBL-4000-02-4RS	1.76 m ²	8x20 "	1" 1/2 VICTAULIC	200	144.000	144,00	10	0	1	-
FBL40004RSFRP0820300WH	FILBLUE FBL-4000-02-4RS	1.76 m ²	8x20 "	1" 1/2 VICTAULIC	300	144.000	144,00	10	0	1	-
FBL40004RSFRP0820500WH	FILBLUE FBL-4000-02-4RS	1.76 m ²	8x20 "	1" 1/2 VICTAULIC	500	144.000	144,00	10	0	1	-
FBL40004RSFRP0820800WH	FILBLUE FBL-4000-02-4RS	1.76 m ²	8x20 "	1" 1/2 VICTAULIC	800	144.000	144,00	10	0	1	-



European Community members only.

These filters are free of the "CE" stamp since they are included in the article n. 4 para 3 of the P.E.D. 2014/68/EU of 15 May 2014. These filters can be used only with the fluid and design that respect the conditions established by the directive above mentioned.

PED REFERENCES: PED 2014/68/EU

FLUID: NOT DANGEROUS, ARTICLES: 4.1 LETTER (a) (ii); 4.3; 13.1


Industrial self cleaning filters

BACKWASHABLE SELF CLEANING FILTERS

FILBLUE FBL-4000-02-4RS

SELF CLEANING FILTERS CODE LIST

Model	Material		Connection IN/OUT		Micron		Specs and finishing	
FBL40004RS	FRP (Fiberglass)	FRP	8x20 "	0820	50 µm	50	White	WH
					80 µm	80		
					125 µm	125		
					200 µm	200		
					300 µm	300		
					500 µm	500		
					800 µm	800		

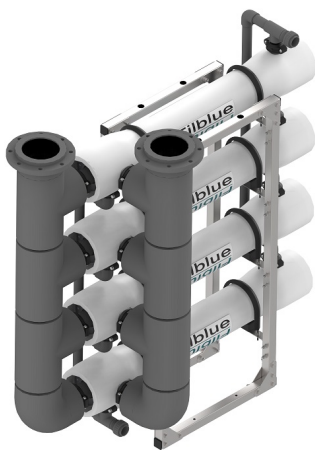

Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure
Flow rate chart available on www.everblue.it by choosing microns gradient and connections and selecting specific product data sheet