

Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP95BL5L200

[Link to PDF product's drawing](#)

 www.everblue.it/CadDrawings/F20190605153924949PP99BL5L20020__BL

FEATURES

Model	PP95BL5L200
Type	Pleated polypropylene
Height	20"

Micron	1 / 5 / 10 / 20 / 50
Efficiency	95%

Hot sanitizing	No
----------------	----

MATERIAL

Filtration material	Polypropylene
Internal core	Polypropylene
External core	None

PRESSURE

Max working pressure	10 bar
Max differential pressure suggested	1 bar

TEMPERATURE

Max working temperature	50°C
-------------------------	------

APPLICATIONS

- Water
- Sea water

OTHER APPLICATIONS ONLY AFTER WRITTEN APPROVAL OF MANUFACTURER

- Electronic/Nuclear
- Biotechnology/Fine chemicals
- Food/Beverage
- Coatings/Resins
- General Industrial
- Bulk Chemicals/Petrolchemicals
- Pharmaceutical/Cosmetics

Code	Description	Height	Micron	Flow l/h ¹	Filtrating surface	Quantity box	-
PP95BL5L2002001	PP95BL5L200 20-01	20"	1	12.000	3,40 m ²	1	
PP95BL5L2002005	PP95BL5L200 20-05	20"	5	18.000	3,40 m ²	1	
PP95BL5L2002010	PP95BL5L200 20-10	20"	10	18.000	3,40 m ²	1	
PP95BL5L2002020	PP95BL5L200 20-20	20"	20	18.000	3,40 m ²	1	
PP95BL5L2002050	PP95BL5L200 20-50	20"	50	18.000	3,40 m ²	1	



Approximate picture. End caps and height's choice will lead to the assembly of a product which could differ from those shown in figure


Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP95BL5L200

END CAPS LIST

End caps	BL
CODE	BL



CARTRIDGE CODE LIST

Model	Height	Micron	Connection	Seals
PP95BL5L200	20"	20	1 5 10 20 50	01 05 10 20 50
BL	BL	*Silicone	S	* standard o-ring


Pleated filtration cartridges

PLEATED POLYPROPYLENE CARTRIDGE

PP95BL5L200

FLOW RATE VS PRESSURE DIFFERENTIAL

Pressure differential

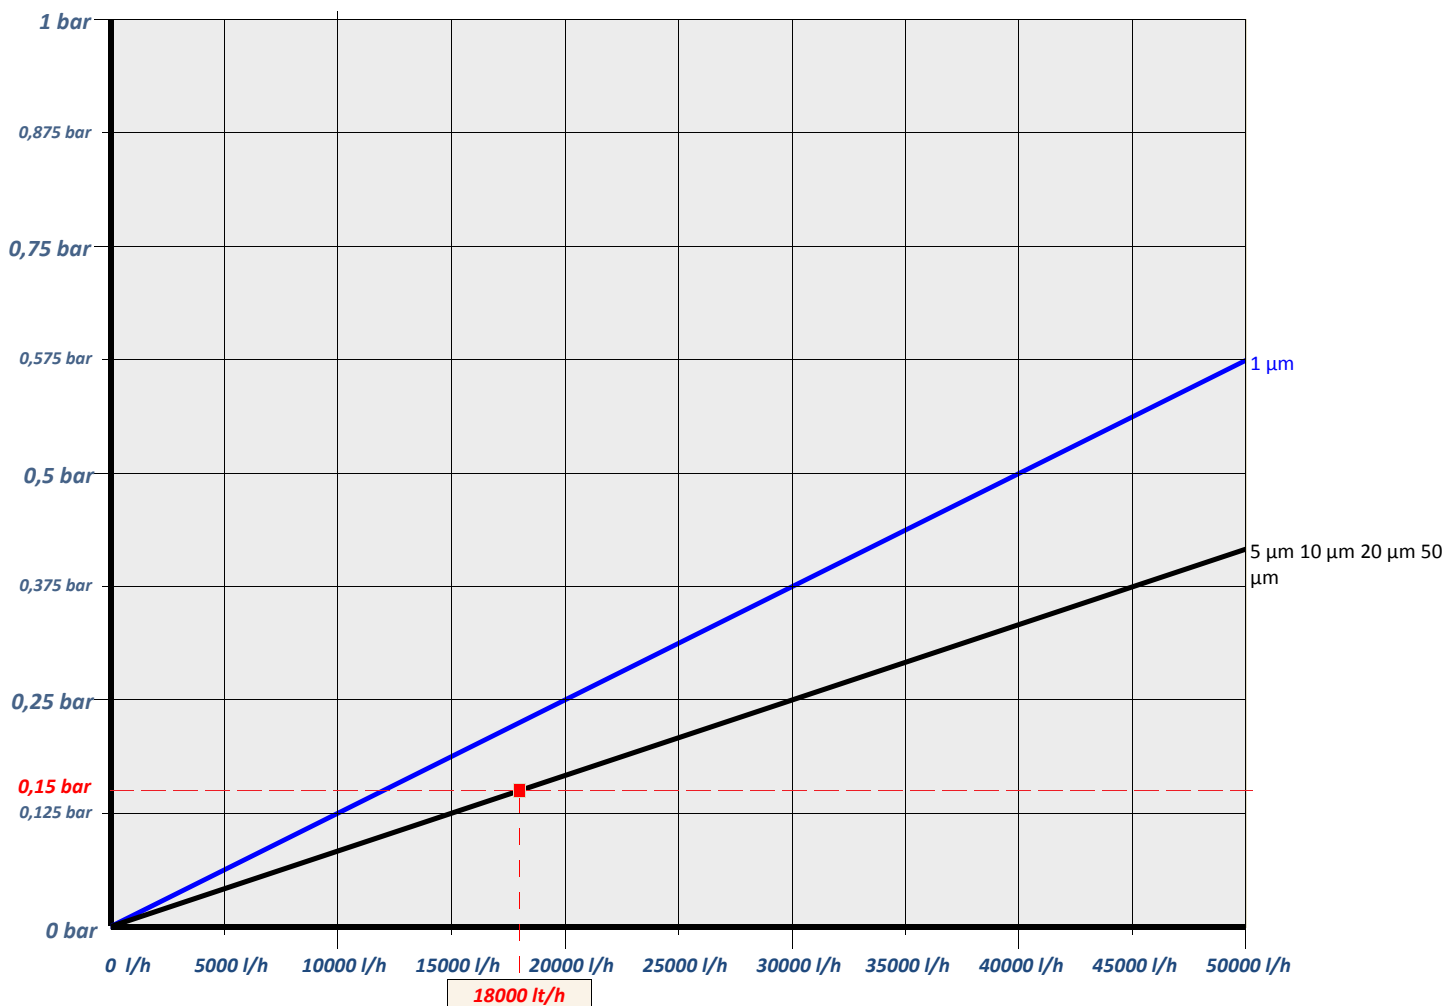

Graphic refers to 20" height cartridges. Make the correct proportion to obtain flow for taller cartridges.

Flow